


# STEP #1

## BASS DRUM ASSEMBLY

Front of bass drum is determined by forward position of (1) bass drum spur (leg) mounts and (2) tom mount.

When installing front (logo) drum head, center logo between the top two drum lugs.

Use the same tension rod procedure for installing the drum head on the rear of the bass drum.

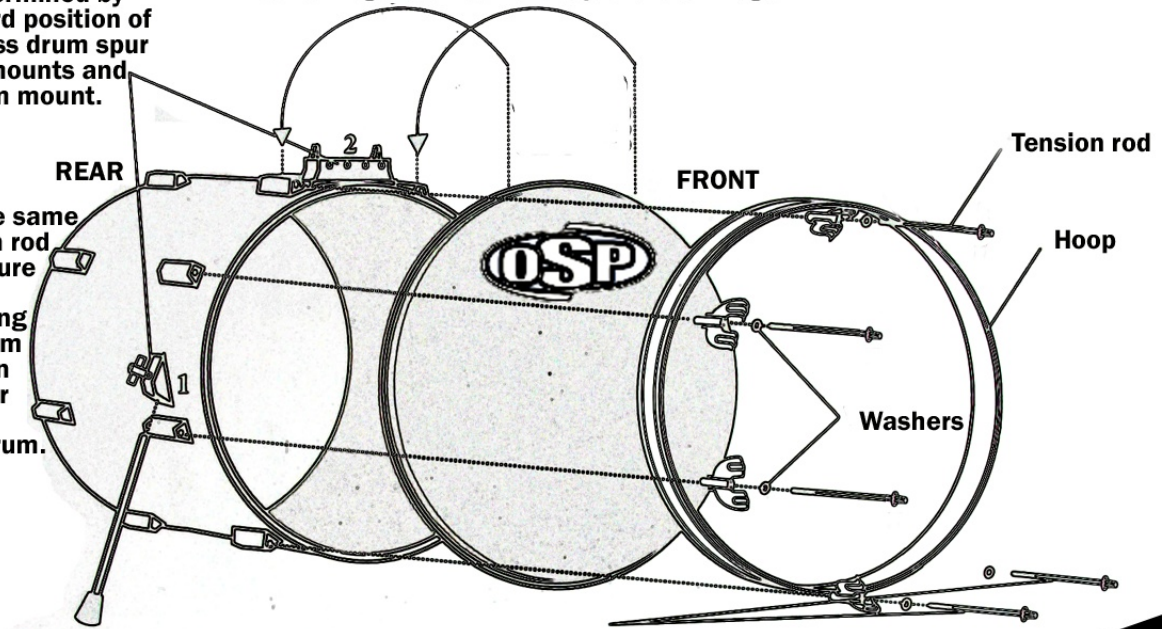


On the rear side of bass drum, attach bass drum pedal to hoop by tightening hoop clamp wing screw securely.



## TOM TOM ASSEMBLY

For all tom drums, including floor tom.

Follow the procedure shown when installing the drum heads. First finger-tighten all the tension rods. Then with drum key, give each tension rod a few turns until the wrinkles in the head disappear. Then tune top and bottom head close to each other in pitch, but not too tight! The pitch of the tom drums goes from smallest: highest pitch down to largest: lowest pitch.

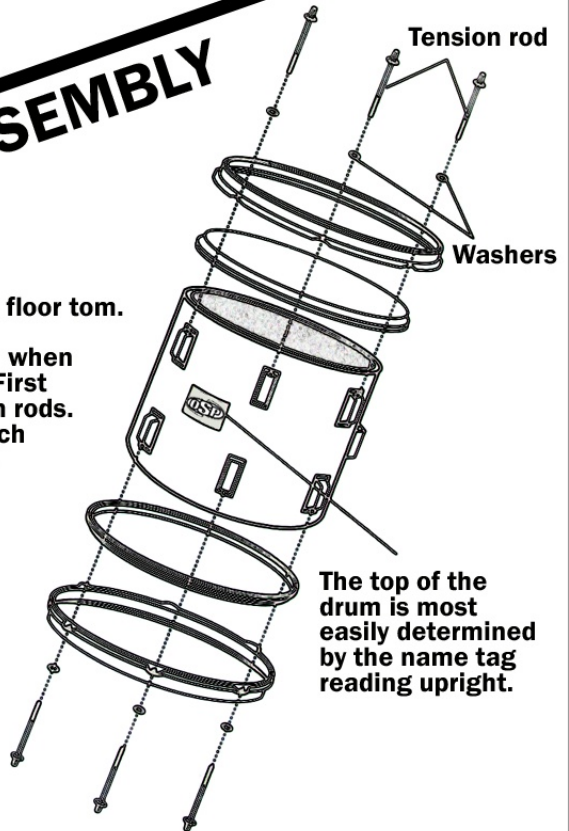

The top of the drum is most easily determined by the name tag reading upright.

# STEP #2




# STEP #3

# DRUM KIT ASSEMBLY





Memory locks are tightened at the drummer's preferred playing position to quickly recall during each set-up.





Memory lock shown in place.

Remember. When installing drums, the top of the drum is determined by the name tag reading upright.

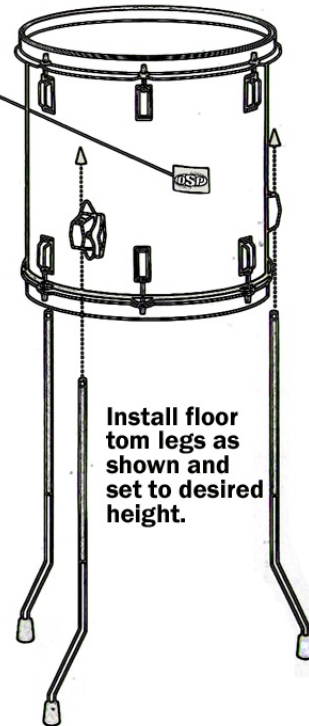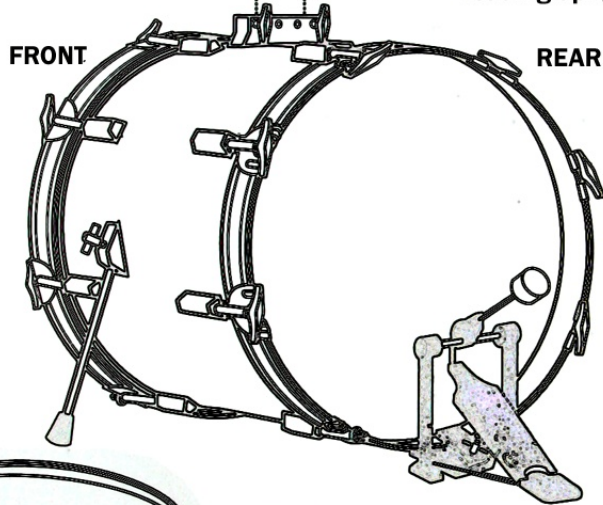


Install floor tom legs as shown and set to desired height.

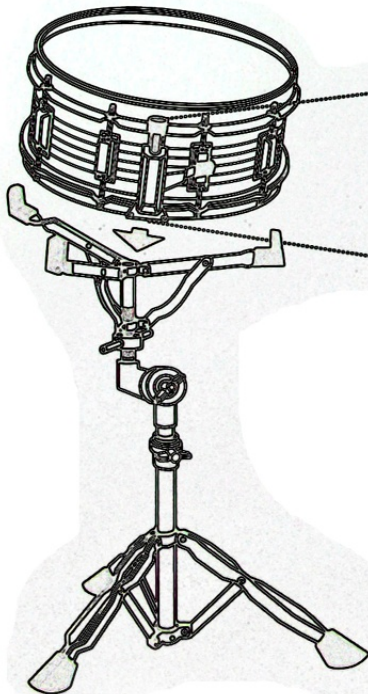


The snare drum "snares" are engaged by putting the lever in the "up" position.

CRASH/RIDE CYMBAL

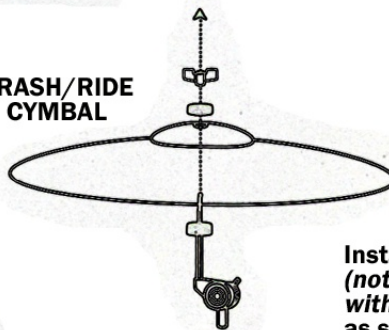

HI-HAT

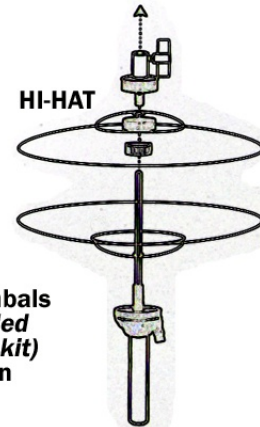

Install cymbals (not included with drum kit) as shown in diagram.